



CV100W24CG Triac

**Constant Voltage & Dimmable Driver****Model: CV100W24CG Triac**

Model	Output Current	Input Current	Input Power	Output Power Range	PF	Efficiency	Output Voltage	No load Watt
CV100W24CG Triac	4.2A	0.6A	115W	33-100W	0.95	91%	24V	<1W

**\* Test result @230V, 50Hz, Full Load.****1. Parameters**

category	Item	Technical Norm
Features	Output Type	Constant Voltage
	Dimming Type	Phase dimming
	Dimming Range	10%-100%
	IP Grade	IP20
	Insulation Class	Class II
Input	Rated Input Voltage	220-240VAC
	Range of Input Voltage	198-264VAC
	Frequency	50/60Hz
	Input Current	≤0.6A (198VAC, full load)
	Input Power	115W (230VAC, full load)
	Power Factor	≥0.95 (230VAC, full load)
	THD	≤15% (230VAC, full load)
	No-load Power Consumption	≤1W @230VAC
	Inrush Current	45A&500us(Cold start)
Connected quantity of 16A Breaker :	16pcs/type B ; 26pcs/type C @ 230Vac	
Output	Output Voltage	24V
	Output Current	1400-4200mA
	Max. Output Power	100W
	Efficiency	≥91% (230VAC, full load)
	Ripple & Noise (Max)	900mVp-p
	Current Accuracy	±5%
	Started Delay Time	≤0.5S (230VAC, full load)
Protection	Short Circuit Protection	Auto Recovery
	Overload Protection	Auto Recovery
	No-load Protection	Auto Recovery
	Ta/Operation Temperature	-25....+50°C

KGP Electronics GmbH  
Hueckstraße 19  
DE-58511 Lüdenscheid

KGP-V0.01

Environment	Ts/Storage Temperature	-20....+70°C
	Tc/Enclosure Temperature	70 °C
	Humidity	5%....85%RH
	Atmosphere	86-108KPa
	Connection Method	Captured Terminal screw
Construction	Installation	Independent
	PRI Wire preparation	0.75-2.5 <sup>□</sup>
	SEC Wire preparation	0.75-2.5 <sup>□</sup>
	Dimension	Independent:210*67*34mm (L*W*H)
	Certification	complied to CE
Standards	Safety Standards	EN61347-1:2015,EN61347-2-13:2014/A1:2017 ,EN62493:2015
	EMC Standards	EN55015:2013/A1:2015,EN61000-3-2:2014,E N61000-3-3:2013,EN61547:2009
	Surge	L-N/1KV
	RoHS	complied to 2011/65/EU
Others	Life Time	50000h @Ta / Tc
	Warranty	5years , F.R. < 10000ppm

Remark: 1. Specific instructions are not all parameters are not connect dimmer input voltage 230 vac / 50 Hz and 25 °C ambient temperature measured.  
 2. LED Driver is a component of the luminaires, Luminaires and wire layout will affect the EMC, please check the EMC with end products again.  
 3. Trailing edge dimmable.

## 2. Trailing Edge Dimmer list approved by KGP

Dimmer	Trade mark	Load type	Ratings	
C-Bus L5504D2U	Clipsal	L,C	220-240V 50-60Hz	Universal
D350S	AcTEC	R,L	220-240V~50/60Hz 10-350W/VA	Trailing
Cat 400T	HPM		230-240Vac 50Hz 10-400W	Trailing
32E450T	Clipsal		220-240V a.c. 50Hz 10-450W	Trailing
315GLE	ELKO		230VAC 50Hz 40-315W	Trailing
6513U-102	Busch(ENST0)	R,C	230V 50Hz 420W/VA	Trailing
SBD315RC	Schneider	R,C	230V~ 50Hz 20-315VA	Trailing
MCU Te250	OSRAM		AC220-240V 50Hz 20-250W	Trailing
AB300	OmniTronix		230/240V 50Hz 10-300W	Trailing

**Leading Edge Dimmer list only on request -/ or confirmed by KGP Electronics**

### 3. Label

Ⓛ  
PRI  
220-240V~

Ⓝ  
0.75-2.5 □

**Dimmable LED Driver**  
**Constant Voltage**  
**CV100W24CG TRIAC**

PRI: 220-240V~ 50/60Hz 0.6A  
SEC: 24V=, 1.4-4.2A, Max.100W  
λ : 0.95  
ta: -20...45°C tc: 80°C

For indoor use only  
Dimmable with leading edge or trailing edge dimmer


Ⓒ

**KGP**  
KGP Electronics GmbH  
Hueckstraße 19  
DE-58511 Lüdenscheid

SEC ⊕  
24V=  
Max. 4.2A  
⊖  
0.75-2.5 □

### 4. Dimension (Unit: mm)

**LxWxH : 210x67x34**

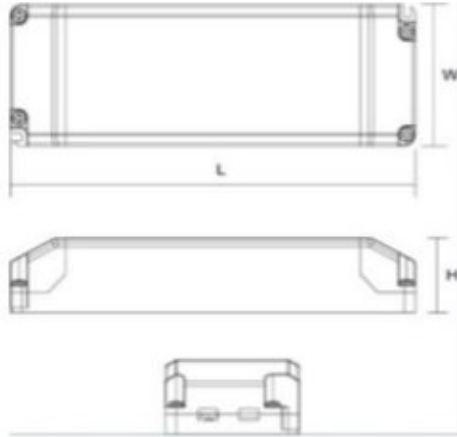

### 5. Wiring Diagram

Push Wire connection : 0.75-2.5mm<sup>2</sup>

